



IS3480 Quantum™E is a compact, omnidirectional bar code scanner ideal for integration with Original Equipment Manufacturer (OEM) devices.

Sunrise 2005 Compliant

IS3480 Quantum™E

Features

- **Fully automatic scanning operation**
- **Easy mounting integration with a unique profile and dual set of mounting holes**
- **Small form factor**
- **Auxiliary connection for external I/O**
- **Sweet-spot mode for ideal mounting location**
- **Single-line mode**
- **Flash upgradeable firmware**
- **User-replaceable, single cable interface to host**
- **OPOS and JPOS system compatible**



Metrologic's **QuantumE** is a combination omnidirectional and single-line laser bar code scanner. The omnidirectional scan pattern offers outstanding scan performance on all standard 1D bar code symbologies, including RSS. The button-activated single line mode aids in scanning items that contain multiple bar codes or when selecting bar codes from menu-style price sheets.

QuantumE is designed for integration with a variety of applications including interactive kiosks, price lookup systems, ATMs, reverse vending machines, controlled access, or a host of other Original Equipment Manufacturer (OEM) devices. The scanner's main cable connector is located at the top of the unit to facilitate



mounting and the auxiliary connector gives users access to several of the I/O signals, providing the flexibility for external hookup of the beeper, button and LEDs. The unique shape of the QuantumE allows the unit to be mounted in slim profile systems, such as a flat screen monitor, and long scan lines provide scanning at the face. In addition, QuantumE features a sweet-spot mode that gives an integrator the ability to determine the best mounting location for optimum scanning in a fixed application. Most importantly, the IS3480 is equipped with powerful and cost saving features such as easy programming, user replaceable cables and upgradeable software that keeps your investment updated with the latest scanning technology.



IS3480 Quantum™ E

OPERATIONAL

Light Source	Visible Laser Diode 650 nm
Laser Power	1.1 mW (peak)
Depth of Scan Field (programmable)	25 mm - 279 mm (1" - 11") for 0.33 mm (13 mil) bar code at default setting
Width of Scan Field	38 mm (1.5") @ 25 mm (1"); 153 mm (6") @ 279 mm (11")
Scan Speed	1650 scan lines per second
Scan Pattern	5 fields of 4 parallel lines, omnidirectional; or button activated single line
Number of Scan Lines	20 (omnidirectional); or 1 (single-line)
Minimum Bar Width	0.127 mm (5.0 mil)
Decode Capability	Autodiscriminates all standard 1D bar codes, including RSS-Expanded, RSS-14 and RSS-14 Limited; for other symbologies call Metrologic
System Interfaces	RS232, Light Pen Emulation, Keyboard Wedge, Stand Alone Keyboard, IBM 468x/469x, USB (low speed and full speed), Laser Emulation, OCIA
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters
Roll, Pitch, Yaw	360°, 60°, 60°
Beeper Operation	7 tones or no beep
Indicators	Blue = laser on, ready to scan; White = good read


MECHANICAL

Length	50 mm (1.97")
Width	63 mm (2.48")
Height	68 mm (2.68")
Weight	170 g (6.0 oz)
Termination	10 position modular RJ45 connector
Cable	Standard 2.1 m (7') straight; optional 2.7 m (9') coiled; For other cables call Metrologic
Mounting Holes	Five - M2.5 x 0.45 threaded inserts, 4 mm (0.16") maximum depth


ELECTRICAL

Input Voltage	5 VDC + 0.25 V
Power	1.825 W
Operating Current	365 mA typical @ 5 VDC
DC Transformers	Class 2; 5.2 VDC @ 650 mA
Laser Class	Class 1; IEC60825-1:1993/A1:1997+A2:2001 Class 1; EN60825-1:1994/A11:1996+A2:2001
EMC	FCC, ICES-003 & EN55022 Class A
Operating	-20°C to 40°C (-4°F to 104°F)
Storage Temperature	-40°C to 60°C (-40°F to 140°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required


Scan Area

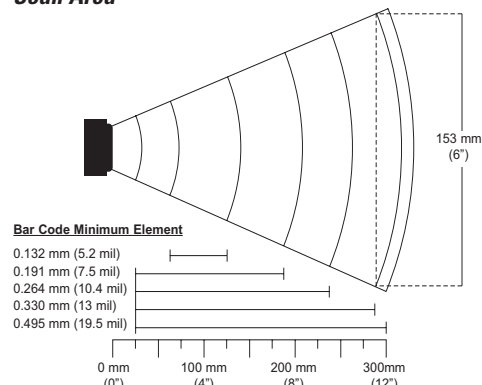

Dimensions

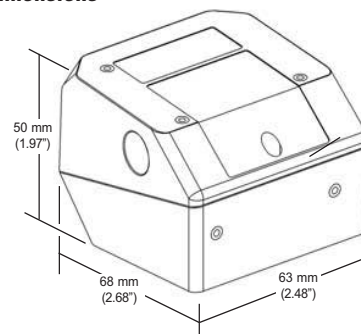

Mounting Holes

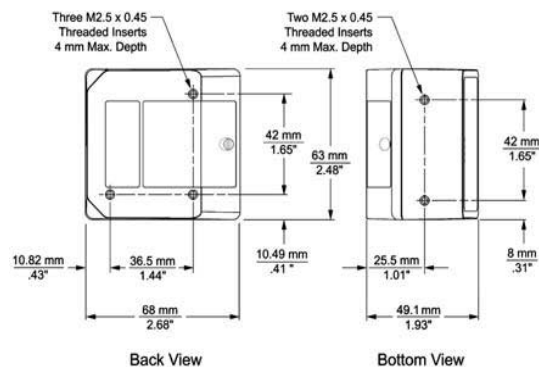

Errors & Omissions Excepted.
Specifications subject to change without notice.
Copyright April 2004. Metrologic, All rights reserved.



CLASS 1 LASER PRODUCT
APPAREIL A LASER DE CLASSE 1
LASER KLASSE 1 PRODUCT
LASER CLASE 1 PRODUCTO

EUROPEAN REGIONAL OFFICES

Eastern-Europe, Middle East
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 222
Fax: +49 (0) 89 89 019 173
Email: info@east.metrologic.com
www.europe.metrologic.com

France, North Africa
Metrologic Eria France SA
Tel: +33 (0) 1 48.63.78.78
Fax: +33 (0) 1 48.63.24.94
Email: info@fr.metrologic.com
www.europe.metrologic.com

Germany, Austria, Switzerland
Metrologic Instruments GmbH
Tel: +49 (0) 89 89 019 0
Fax: +49 (0) 89 89 019 200
Email: info@de.metrologic.com
www.metrologic-instruments.de

Italy, Greece, Turkey
Metrologic Instruments Italia Srl
Tel: +39 0 51 6511978
Fax: +39 0 51 6521337
Email: info@it.metrologic.com
www.metrologic.it

Spain, Portugal
Metrologic Eria Ibérica SL
Tel: +34 913 272 400
Fax: +34 913 273 829
Email: info@es.metrologic.com
www.metrologic.es

UK, Benelux, Scandinavia, South Africa
Metrologic Instruments UK Ltd
Tel: +44 (0)1256 365900
Fax: +44 (0)1256 365955
Email: info@uk.metrologic.com
www.metrologic.co.uk

USA
Metrologic Instruments, Inc.
Tel: 1-800-ID-METRO
Fax: 1-856-228-6673
Email: info@metrologic.com

South America
Metrologic South America
Tel: 5511-5505-6568
Fax: 5511-5505-1681
Email: info@sa.metrologic.com

Brazil (only)
Metrologic do Brasil Ltda.
Tel: 5511-5505-2396
Fax: 5511-5507-2301
Email: info@br.metrologic.com

Asia
Metrologic Asia (Pte) Ltd.
Tel: 65-842-7155
Fax: 886-3-2888292
Email: info@sg.metrologic.com

China (only)
Metro (Suzhou) Technologies Co. Ltd
Tel: 86-512-2572511
Fax: 86-512-2571517
Email: info@cn.metrologic.com

